


**NO GRILLE**

**CLIMA CANAL**  
 ALL JAGA CLIMA CANAL HEATING COMES PRE-ASSEMBLED.  
 ALL ACTIVE UNITS OF 720MM, 1080MM, 1440MM, 1800MM.  
 ONE SIDED 2 PIPE CONNECTION ON THE LEFT.  
 2 X 1/2" STAINLESS STEEL HOSES INCLUDED.  
 HEATING ELEMENT IS FACTORY TESTED TO 20BAR, MAXIMUM WORKING PRESSURE 10BAR.  
 CLAMP CONNECTOR FOR 24VDC ELECTRICAL CONNECTION.  
 CONTROL SPEED OF ACTIVATORS 0-10VDC  
 COLOUR OF THE TRENCH IS RAL 7024.  
 GRILLE SHOWN IS BNA, 6mm SLATS WITH 9mm SPACER NATURAL ALUMINIUM.  
 OPTIONS  
 VALVE IS SHOWN AS AN OPTION  
 DYNAMIC CONTROLLER (JPC) WITH FOLLOWING OPTIONS:  
 DPC.CC21 - HEATING, NO CONTROLLER, TO INITIATE WHEN WATER IS ABOVE 28°C.  
 DPC.CC24 - HEATING, WITH SPEED CONTROLLER, TO INITIATE WHEN WATER IS ABOVE 28°C.  
 (FACTORY CONTROL AT 40%, 60% AND 100% )



REV.	DESCRIPTION	REV.	BY	DATE
-	-	-	-	-
PROJECT REF. <b>CLIMA CANAL H08</b>		SHEET NO. <b>1 of 1</b>		
CUSTOMER: <b>CLIMA CANAL H08</b>		SIZE <b>A1</b>		
DRAWING NO. <b>CLCM H08</b>		PROJECTION <b>REV</b>		
LEDBURY, HEREFORDSHIRE		DATE: <b>08/02/19</b>		
TEL: +44 (0)1531 631 533		SCALE: <b>1/10</b>		
FAX: +44 (0)1531 631 534				

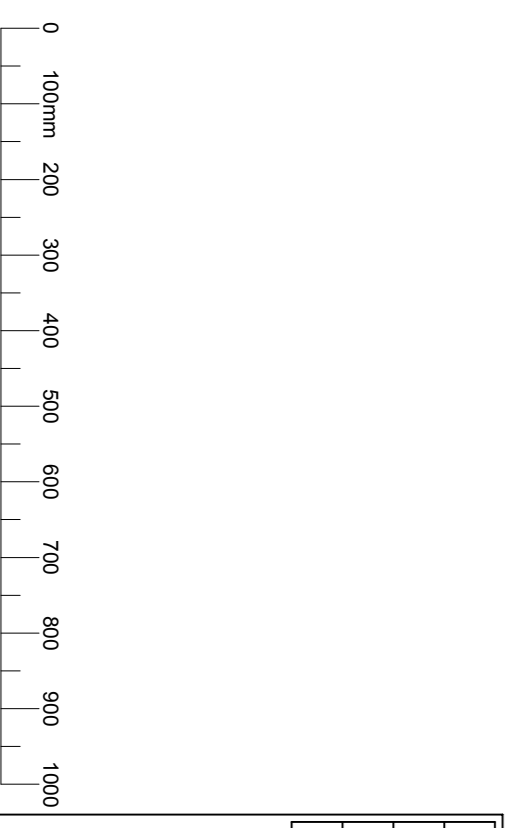