


THE WARWICK

SIZE CHART

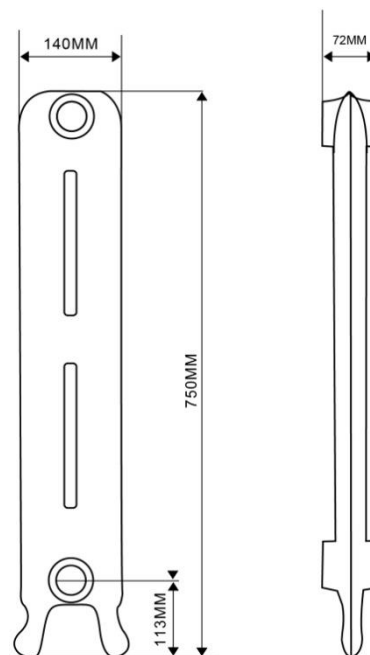

RR 2750

SECTIONS	LENGTH MM	BTUs @ ΔT60	WATTS @ ΔT60
1		464	136
2		928	272
3	248	1392	408
4	320	1856	544
5	392	2320	680
6	464	2784	816
7	536	3248	952
8	608	3712	1088
9	680	4176	1224
10	752	4640	1360
11	824	5104	1496
12	896	5568	1632
13	968	6032	1768
14	1040	6496	1904
15	1112	6960	2040



OVERVIEW

All Beaumont cast iron radiators are carefully hand built to your own required BTUs and fully assembled ready for plumbing into your new or existing pipework.

Burnishing is the optimum finish for the Warwick to accentuate the scrollwork. Burnishing paste is carefully applied by hand over a darker base coat.

The Warwick can be finished in a variety of colours – metallic, Farrow & Ball range, RAL colours or primed for onsite painting.

Because each radiator section is specially hand cast there may often be a slight variation in the length of each radiator once built (end bush to end bush), please allow for this in your pipework fittings.

DEPTH OF SECTION FROM SKIRTING BOARD = 140MM

SECTION WIDTH = 72MM

WEIGHT = 7KG