

All dimensions shown are in millimetres

Inset radiator construction:	dia 25mm round steel tubes
Towel rail construction:	dia 31.8mm round brass tubes
Connection:	1.2m long flying lead (3 core)
Immersion heater rating:	IPX4 or better

Model	Height* ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
BALME/F-085-074	850	735	chrome	400	34

Issue 1.0



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696

Tools & Material Required

Screwdriver - flathead
Electric drill
Masonry drill bit


Key

A Screw

Component

Qty

12

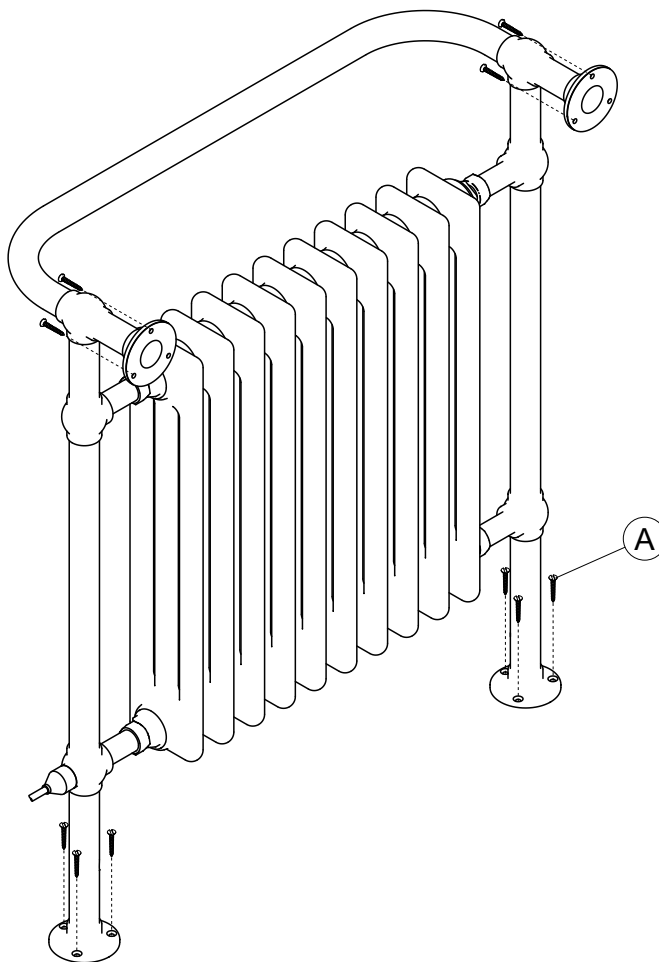

Assembly Instructions

Accurately mark out bracket holes on floor & wall.

Drill twelve fixing holes. Screws (A) are supplied but ensure that appropriate fixings are used for the type of wall the radiator is being mounted on.
Screw radiator to floor & wall.

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.