
Zehnder Roda Spa Asym Electric





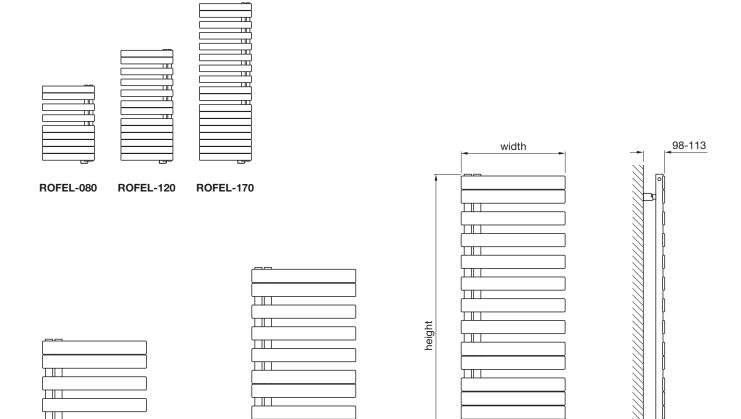

All dimensions shown are in millimetres

ROFER-080

All steel construction: 70mm x 11mm horizontal tubes

dia 38mm vertical tubes

ROFER-120

Connections: 1.2m long flying lead (2 core)

			Number		
Model	Height ± 2mm	Width ± 2mm	of Sections	Output Watts	Weight kg
ROFEL-080-055/GF ROFEL-120-055/GF ROFEL-170-055/GF	828 1206 1699	550 550 550	9 13 18	500 750 1000	15.3 21.3 28.9
ROFER-080-055/GF ROFER-120-055/GF ROFER-170-055/GF	828 1206 1699	550 550 550	9 13 18	500 750 1000	15.3 21.3 28.9
					Issue 1.0





ROFER-170

Zehnder Roda Spa Asym Electric



Tools & Material Required	Key	Component	Qty
Tape measure	Α	Wall Plug	3
Electric drill	В	Bracket	3
Masonry drill bit - 8mm diameter	С	Screw - 6mm dia x 50mm	3
Spirit level	D	Washer	3
Stepladder (for taller radiators)	E	Grub Screw	3
	F	Allen Key	1


Assembly Instructions

Accurately mark out bracket holes on wall using spirit level. Drill three holes & insert wall plugs (A).

Attach brackets (B) to wall with screws (C) & washers (D). Slide post on radiator into bracket (B) and secure in position by tightening grub screw (E) with allen key (F).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

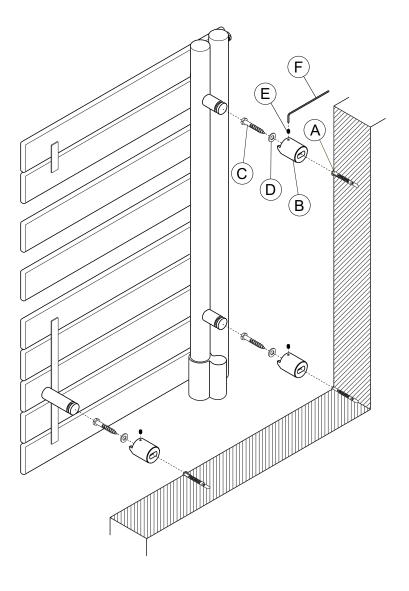





Camberley Surrey GU15 3AD